Power Strip Multicore NPSMSX-S2-T6 (U.S.)

1 x Socapex 419 compatible In – 6 x powerCON® TRUE1® TOP, 1 x Socapex 419 compatible Out

Power Strip Multicore are extremely rugged and compact distribution boxes which allow significant reduction of the cabling effort and cost due to the multicore inputs. It is ideally suited for indoor usage and demanding mobile applications. 2 x Socapex 419 compatible In – 6 x powerCON® TRUE1® TOP Out

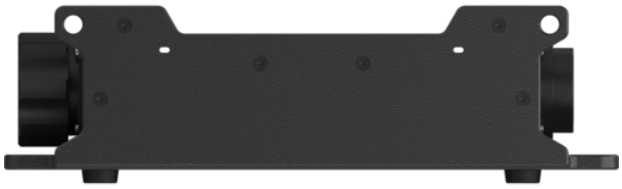

All rights reserved / 30.10.2026

Features & Benefits

- **Reduction of cabling volume and effort** due to Socapex 419 compatible multipin Input / Daisy-chain.
- **High mechanical protection**: Rugged Easylen® housing with high IK, full connector protection with housing elements.
- **Very compact design**: Height & Width only 96mm & 150mm due the stepped top plate.
- **Easy transport & handling:** stackable, lightweight, fully lockable. Options with the handle on the request.
- **Versatile mounting options**: mounting wholes for pegs and suspension, truss clamp

Markets & Applications

- Markets: Professional video wall / lighting / audio
- Mobile application: Festivals, live events
- Semi-permanent applications: Theaters, studios

Ordering information

Article name	Details	Order code
NPSMSX-S2-T6	IN / Daisy chaining: 2 x Socapex 419 compatible, OUT: 6 x powerCON® TRUE1® TOP	1038769

Technical Information

Product	
Input device	1 x Socapex 419 compatible (6 channels)
Output device	6 x powerCON® TRUE1® TOP with self-closing caps
Daisy chaining	1 x Socapex 419 compatible (6 channels)

All rights reserved / 30.10.2026

Electrical

Contact resistance / protection class Dielectric strength	Protection class II
Dielectric strength	0,5 kV / mm
Rated voltage	250V AC
Rated Current	20A

Mechanical

Dimensions	150 x 95,25 x 330mm
Weight	
Conductor cross section	AWG12
Mounting options	Truss clamp (M10), mounting holes for pegging or suspension
Type of construction	Stackable

Material

Housing	Easylen
Color	black

Environmental

Standard compliance	ETL Listing according to UL Standard 1640 – Pending
Flammability acc. to UL 94	V0
Protection class	NEMA1 listing - pending. IP20.
Temperature range	-25 °C bis +40 °C

All rights reserved / 30.10.2026