




## Power Container Xtreme Outdoor CPC63-C1-H4- CBM

**1x CEE63A IN – 4x E16 Multipin OUT – 1x cPot OUT –  
Circuit breakers**

Power Container is a highly reliable, rugged and first level powerful distribution solution. The Power Container allows reduction of cabling effort & cost, circuit protection and power measurement. It is ideally suited for demanding mobile applications esp. video walls, lighting, and others.

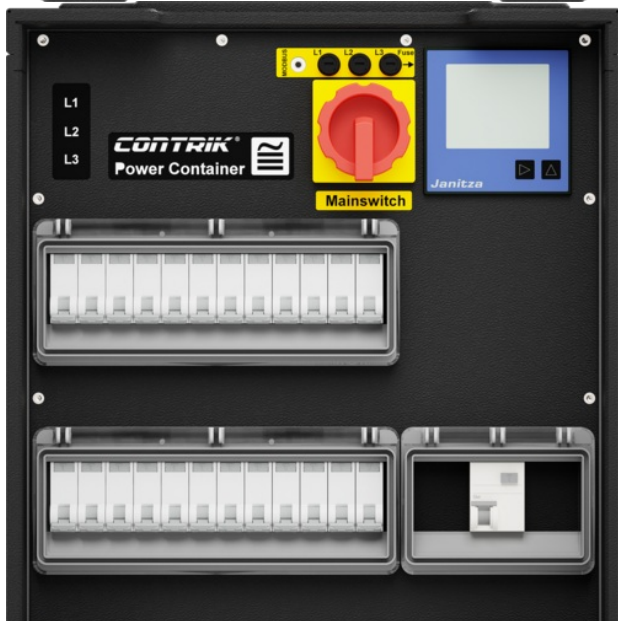



## Features & Benefits

- ✓ High durability & protection: rugged Easylen® housing with high IK, IP44 with CEE / cPot in mated condition, self-closing caps, connector protection, flame retardant & non-conductive housing material
- ✓ Easy transport & handling: compact, stackable, fully lockable, integrated handles
- ✓ Reduction of cabling volume and effort due to 4x Harting E16 Multipin Outs
- ✓ Minimization of failure impact on the event. Due to separate protection of each OUT channel against overload and electric shock (63A version)
- ✓ High quality of component and assembly add to high reliability and safety of the power distribution and the event

## Markets & Applications

- ✓ Markets: LED walls, Lighting, Other
- ✓ Mobile applications: Festivals, live events
- ✓ Semi-permanent applications: Theaters, studios, fairs

## Order information

Product title	Details	Order code
CPC63-C1-H4-CBM	<p>Front. 1x main switch 4-pin; LED mains monitor L1, L2, L3 (after HS); 1x measuring device Selec MFM 384, 3-wire, Modbus interface, (in front of HS); Fusing (under self-closing protective windows): 25x RCBO C16/0.03A (1-pole + N).</p> <p>Back. In: CEE 63A 5-pin plug connector, red; Out: 4x Harting HanE 16-pin panel socket (6 channels, assignment 1-9) with sealing cap, 3x powerCON TRUE1 panel socket self-closing caps, cPot ground connection. Housing made of flame-retardant, impact-resistant Easylen® with leather grain; Structure similar to protection class II, IP44, stacking rails at the top, foot runners, folding handles on the side. Dimensions (WTH): approx. 395 x 295 x 405mm</p>	1028226

## Technical Information

Product	
Input device	1x CEE63A 5P red
Output device	4x Harting E16 6ch [1-9] (24 RCBOs) 3x PowerCON TRUE1 TOP (1x RCBO) 1x cPot
Main switch	4pol
Power meter	Selec MFM 384

Circuit protection	25x RCBO (1-pole + N)
Phase control indicator	L1, L2, L3, green
Rated voltage	415V/AC, 50Hz
Rated Current	In: 63A

## Mechanical

Type of construction	Stackable
Dimensions	ca. 395 x 295 x 405 mm
Weight	17,9 kg

## Material

Housing	Easylen®
Color	black

## Environmental

Protection class	IP44 with CEE and cPot in mated condition
Temperature range	-5 °C to +40 °C