



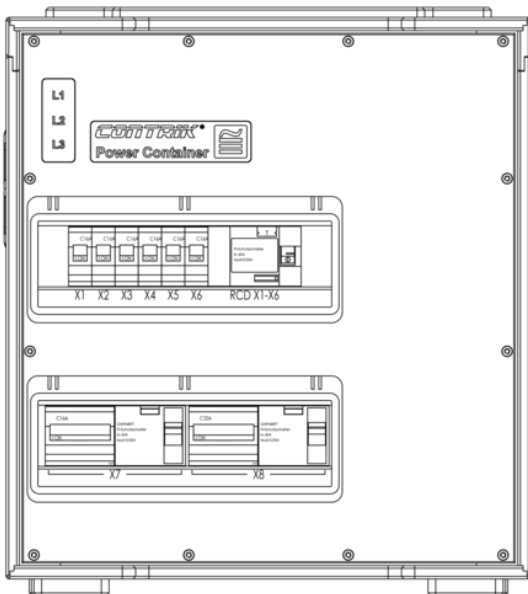

Power Container Xtreme Outdoor CPC63-C2- C2T3F3-RB

On request modification.

Power Container is a highly reliable, rugged and first level powerful distribution solution.

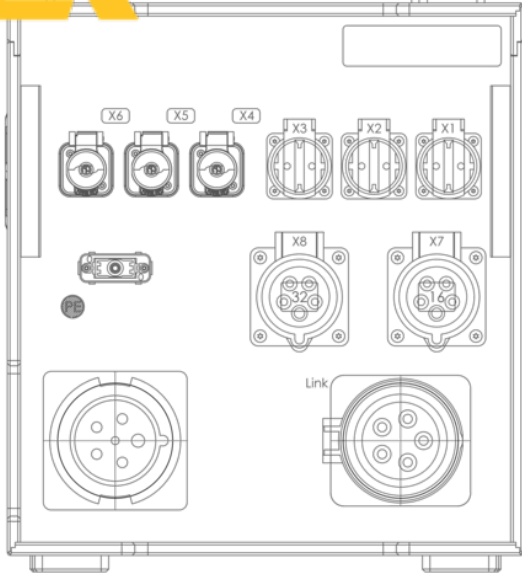

Features and Benefits

- ✓ **High durability & protection:** rugged Easylen® housing with high IK, IP44 with all connectors in mated condition, self-closing caps, connector protection, flame retardant & non-conductive housing material
- ✓ **Easy transport & handling:** compact, stackable, fully lockable, integrated handles
- ✓ **High quality of component and assembly** add to high reliability and safety of the power distribution and the event

- ✓ Markets: LED walls, Lighting, Other
- ✓ Mobile applications: Festivals, live events
- ✓ Semi-permanent applications: Theaters, studios, fairs

Order information

Product title	Details	Order code
CPC63-C2-C2T3F3-RB	Please see the drawing and technical information below.	1038189

Technical Information

Product	
Input device	1x CEE63A 5P red
Output device	<p>1x CEE63A 5P red (-)</p> <p>1x CEE 32A 5P (1x MCB32A C 3P, 1x RCCB 40A 30mA 4P)</p> <p>1x CEE 16A 5P (1x MCB16A C 3P, 1x RCCB 40A 30mA 4P)</p> <p>3x PowerCON TRUE1 TOP & 3x Schuko F Type (6x MCB16A C 1P, 1x RCCB 40A 30mA 4P)</p> <p>1x cPot</p>
Main switch	-
Power meter	-

Phase control indicator	L1, L2, L3, green
Rated voltage	415V/AC, 50Hz
Rated Current	In: 63A

Mechanical

Type of construction	Stackable
Dimensions	ca. 395 x 295 x 405 mm

Material	Quantity	Unit Price	Total Price
Concrete	1000	150	150000
Steel	500	200	100000
Brick	2000	50	100000
Wood	100	1000	100000
Paint	50	2000	100000
Roofing	100	1000	100000
Plumbing	50	2000	100000
Electrical	50	2000	100000
Insulation	100	1000	100000
Windows	50	2000	100000
Doors	50	2000	100000
Handrails	50	2000	100000
Lighting	50	2000	100000
Landscaping	50	2000	100000
Security	50	2000	100000
Other	50	2000	100000
Total			1000000

Housing	Easylen®
Color	black

Environmental

Protection class	IP44 with CEE and cPot in mated condition
Temperature range	-5 °C to +40 °C