


POWER RACK XTREME CPRX125-C1-C6-RBM

On request modification.

IN: Input cable 2m 1x CEE125A, **OUT:** 2 x CEE63A, 2 x CEE32A, 1 x CEE16A.

Power Rack Xtreme is a powerful and highly reliable distribution solution for installation in the 19" Rack. It is ideally suited for amplifier rack wiring application.

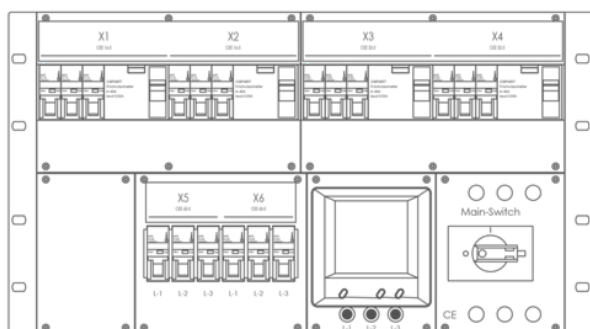

Features & Benefits

- ✓ High quality electrical and electronical component from the renowned brands
- ✓ Circuit protection with residual current device (RCCB) and miniature circuit breakers (MCB)
- ✓ High quality assembly in EU
- ✓ Attractive price / value ratio

- ✓ Markets: Professional audio esp. amp rack wiring / lighting / video wall
- ✓ Mobile applications: Festivals, live events. Control panels / rooms.
- ✓ Semi-permanent applications: Theaters, studios, fairs. Control panels /rooms.

Ordering information

Article name	Details	Order code
CPRX125-C1-C6-RBM	Front: 18x MCB (1-pole), 4x RCCB (3-pole + N), Back: IN: 1x Input cable 2m with CEE125A, OUT: 2x CEE63A, 2x CEE32A, 2x CEE16A	1038251

Technical Information

Product	
Input device	1x Input cable 2m with CEE125A
Daisy chain	
Output device	2x CEE63A (6x MCB 1P) 2x CEE32A (6x MCB 1P, 2x RCCB 40A 3P+N) 2x CEE16A (6x MCB 1P, 2x RCCB 40A 3P+N) 1x cPot
Main switch	1x main switch 4-pin
Power meter	Selec MFM 384

Phase control indicator	
Rated voltage	400V
Rated Current	125A

Mechanical	
Weight	
Type of construction	19" Housing 6 HE

Material	
Housing	Metal
Color	Black

Environmental	
Protection class	IP20
Temperature range	-5 to +40°C