


POWER RACK XTREME CPRX63-C1-H4C1T6- ROM

On request modification.

IN: Input cable 2m 1x CEE63A, OUT: 4x Harting E16,
1x CEE32A, 6x powerCON TRUE1 TOP.

Power Rack Xtreme is a powerful and highly reliable distribution solution for installation in the 19" Rack. It is ideally suited for amplifier rack wiring application.

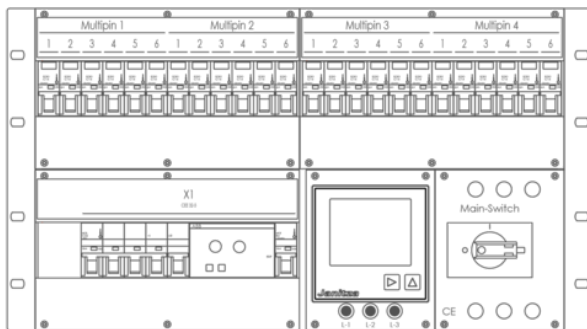

Features & Benefits

- ✓ High quality electrical and electronical component from the renowned brands
- ✓ Circuit protection with residual current device with overcurrent protection (RCBO)
- ✓ High quality assembly in EU
- ✓ Attractive price / value ratio

Markets & Applications



Markets: Professional audio esp. amp rack wiring / lighting / video wall

- ✓ Mobile applications: Festivals, live events. Control panels / rooms.
- ✓ Semi-permanent applications: Theaters, studios, fairs. Control panels /rooms.

Ordering information

Article name	Details	Order code
CPRX63-C1-H4C1T6-ROM	Front: 24x RCBO (1-pole+N), 1x adjustable residual current monitoring ABB RD3P with fuse protection, 1x measuring device Janitza UMG96RM-E with Ethernet interface, 1x main switch, Back: IN: 1x Input cable 2m with CEE63A, OUT: 4 x Harting E16, 1x CEE32A, 6 x powerCON TRUE1 TOP	1038252

Technical Information

Product	
Input device	IN: 1x Input cable 2m with CEE63A
Daisy chain	
Output device	4x Harting E16 6ch [1-9] (24x RCBO (1-pole+N)) 1x CEE32A (1x MCB C32 3-pole+N with adjustable residual current monitoring ABB RD3P with fuse protection) 6x powerCON TRUE1 TOP (parallel to Harting 1) 1x Neutrik EtherCON 1x cPot
Main switch	1x main switch 4-pin
Power meter	Janitza UMG96RM-E

Phase control indicator	
Rated voltage	400V
Rated Current	63A

Mechanical	
Weight	
Type of construction	19" Housing 6 HE

Material	
Housing	Metal
Color	Black

Environmental	
Protection class	IP20
Temperature range	-5 to +40°C