




Power Strip Multicore CPSM-S2-T6

IN: 1 x Socapex 419 compatible – OUT: 6 x
powerCON® TRUE1® TOP, 1 x Socapex 419 compatible

Power Strip Multicore are extremely rugged and compact distribution boxes which allow significant reduction of the cabling effort and cost due to the multicore inputs. It is ideally suited for outdoor usage and demanding mobile applications. 2 x Socapex 419 compatible In – 6 x powerCON® TRUE1® TOP Out

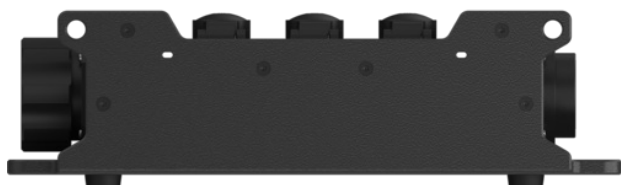

- ✓ **Reduction of cabling volume and effort** due to Socapex 419 compatible multipin Input / Daisy-chain.
- ✓ **High mechanical protection:** Rugged Easylen® housing with high IK, full connector protection with housing elements.
- ✓ **Xtreme Outdoor protection:** IP65 with Socapex 419 compatible in mated condition, sealing caps
- ✓ **Very compact design:** Height & Width only 96mm & 150mm due the stepped top plate.
- ✓ **Easy transport & handling:** stackable, lightweight, fully lockable. Options with the handle on the request.
- ✓ **Versatile mounting options:** mounting wholes for pegs and suspension, truss clamp

Market & Application

- ✓ **Markets:** Professional video wall / lighting / audio
- ✓ **Mobile application:** Festivals, live events
- ✓ **Semi-permanent applications:** Theaters, studios

Ordering information

Article name	Details	Order code
CPSM-S2-T6	IN / Daisy chaining: 2 x Socapex 419 compatible, OUT: 6 x powerCON® TRUE1® TOP	1037504

Technical Information

Input device	1 x Socapex 419 compatible (6 channels)
Output device	6 x powerCON® TRUE1® TOP with self-closing caps
Daisy chaining	1 x Socapex 419 compatible (6 channels)

Electrical

Contact resistance / protection class Dielectric strength	Protection class II
Dielectric strength	0,5 kV / mm
Rated voltage	250V AC
Rated Current	16A

Mechanical

Dimensions	150 x 95,25 x 330mm
Weight	
Conductor cross section	2,08 mm ²
Mounting options	Truss clamp (M10), mounting wholes for pegging or suspension
Type of construction	Stackable

Material

Housing	Easylen
Color	black

Flammability acc. to UL 94	V-2
Protection class	IP65 with Socapex 419 compatible connector in mated condition
Temperature range	-25 °C bis +40 °C