




Power Turtle Xtreme Outdoor CPT-C2-T6-CB (EU)

1x CEE32A In – 6x powerCON® TRUE1® TOP Out, 6x
MCB circuit breakers

Power Turtle Active is an rugged compact distribution box which features separate circuit protection against the overload (MCB) for of each Out, and popular CEE32A connector for input & daisy chain. It is ideally suited for outdoor usage and demanding mobile applications. 1x CEE32A In – 6x powerCON® TRUE1® TOP Out, 6x MCB circuit breakers.

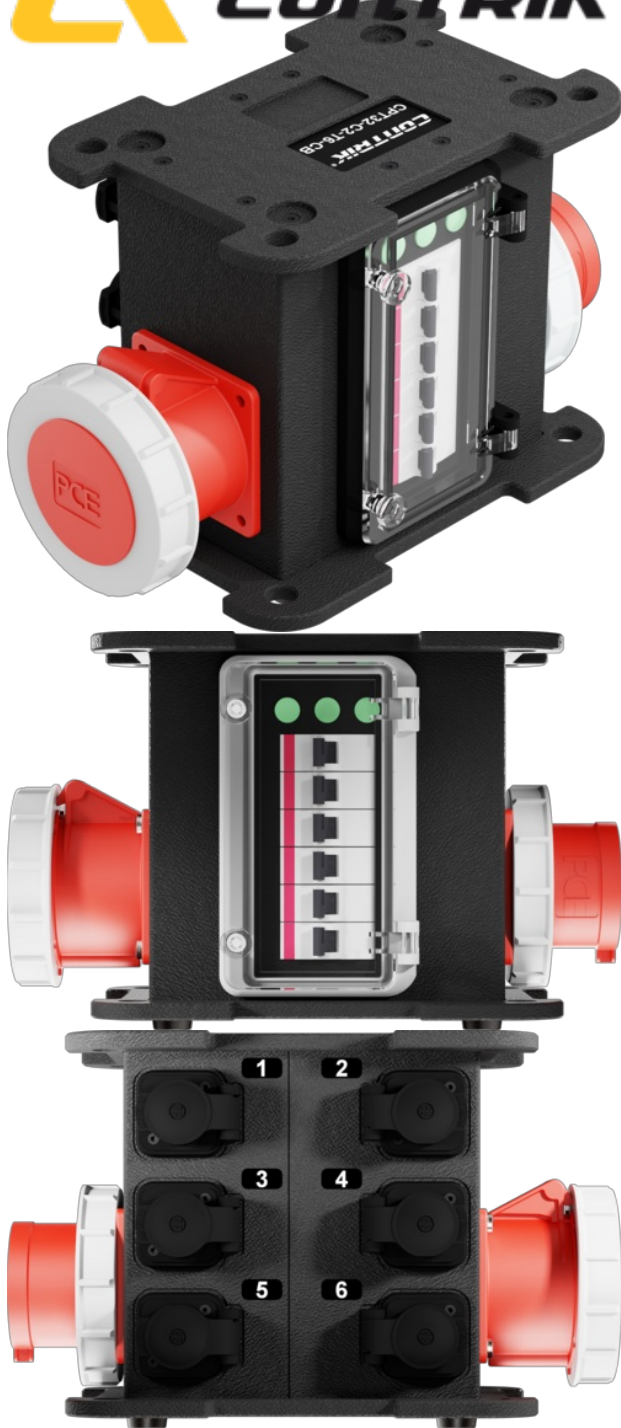

Features & Benefits

- ✓ High power capacity thanks to the CEE32A connector
- ✓ Circuit protection against overload for each of 6x Outs with separate MCB
- ✓ High durability & protection: rugged Easylen® housing with high IK, high IP with CEE



connector in mated condition, self-closing caps, flame retardant & non-conductive housing material

- ✓ Easy transport & handling: stackable with other Power Turtles, lightweight, fully lockable
- ✓ Versatile mounting options: pegs, suspension, truss clamp

Markets & Applications

- ✓ Markets: Professional video wall / lighting / audio
- ✓ Mobile application: Festivals, live events
- ✓ Semi-permanent applications: Theaters, studios

Ordering information

Article name	Details	Order code
CPT-C2-T6-CB	IN: 1x CEE32, Daisy Chain: 1x CEE32, OUT: 6x powerCON T1 TOP, Circuit protection: 6x MCB (1-pole)	1028847

Technical Information

Product	
Input device	1x CEE32A red
Daisy chaining	1x CEE32A red with self-closing caps
Output device	6x powerCON® TRUE1® TOP with self-closing caps

Circuit protection	6x MCB (1-pole)
Phase control indicator	L1, L2, L3, green
Contact resistance / protection class	Protection class II
Dielectric strength	0,5 kV / mm
Rated voltage	415V AC
Rated Current	16A
Number of electrical contacts	4 + PE
Phases	three-phase

Mechanical

Dimensions	225 x 155 x 188 mm
Weight	3,3 kg
Conductor cross section	OUT: 2,08 mm ² Daisy chaining: 6 mm ²
Mounting options	Truss clamp (M10), mounting wholes for pegging or suspension
Type of construction	Stackable

Material

Housing	Easylen
Color	black

Environmental

Flammability acc. to UL 94	V-2
Temperature range	-25 °C bis +40°C

